


UNINTERRUPTIBLE POWER SUPPLY
เครื่องสำรองไฟ เซอร์คอน รุ่น เอไอ A.i (Plus)



หน้าจอดิจิทัล แอลซีดี

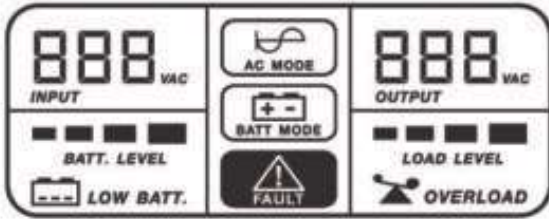

- + INPUT VOLTAGE
- + OUTPUT VOLTAGE
- + BATTERY LEVEL
- + LOAD LEVEL
- + LOW BATTERY
- + AC MODE
- + BATTERY MODE
- + FAULT & REPLACE
- + OVERLOAD

Rear Panel



- หลังเครื่อง**
1. AC Input
 2. Fuse Protection
 3. AC Output & Surge Protection
 4. Surge Protection Only (No Backup)
 5. RJ-11 Surge Protection
 6. USB port

Specifications		A.i (Plus)
Rating	VA	1000VA
	WATT	630W
	*Optional	
Input	Voltage	220 VAC +/-25%
	Frequency	50/60Hz +/-10% (Auto sensing)
Output	Voltage	220 VAC +/-10%(AVR,Line) , +/-5%(Battery)
	Frequency	50Hz. (+/-0.1%)
	Wave Form (Battery Mode)	Simulate Sine Wave, Modified Sinewave
System Protection	System Design	Line Interactive with Stabilizer, Microprocessor Control
	Transfer Time	typical 2 ms.
	Surge Energy Dissipation	320 Joules (6500A)
	Noise Filter	EMI Suppression
	Overload & Short Circuit	Reset Fuse Protection
Battery	Type	Maintenance free Sealed Lead-acid Battery
	Recharge Time	4-6 hours (90% after fully discharged)
	Backup Time	Backup Time 15-30 Mins. (Depend on loads)
Indicator	LCD Digital Display	AC Mode, Battery Mode, Input Voltage, Output Voltage, Battery Level, Load Level, Low Battery, Overload, Fault & Battery Replace
Environment	Ambient Temperature	0 to 40 °C
	Audible Noise	<40db (1Meter)
	Relative Humidity	90% (non-condensing)
	Safety	EN 50091-1-1, EN 50091-2
Software	USB Port	Window 2000, 2003, XP, Vista, 2008, Window 7, Linux, Unix, Max
Factory Standard	Regulatory Approvals	TISI.1291-2553, TISI.1291-2555, ISO9001, ISO14001, CE, FCC, RoHS
Dimensions	DxWxH (mm.)	298 x 101 x 142
Weight	k.g.	4.6kg.

• All specifications subject to change without notice. • Custom-made specifications are acceptable.

ZIRCON POWER SOLUTION CO., LTD.
295 Mongkol Tower, 3rd Fl, Ramintra Rd,
Anusawaree, Bangkok, Bangkok 10220,
THAILAND. Tel: (66) 2970-7575
Fax: (66) 2970-7676

<http://www.zircon.co.th>

