


เครื่องอ่านบัตรแบบ Standalone

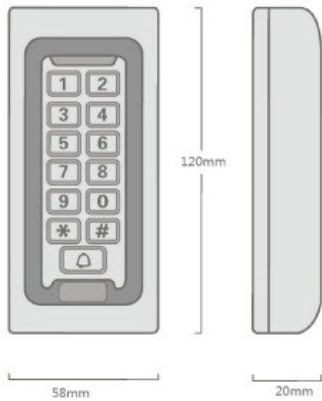

HIP MODEL :

# CMG601

CMG601ID 125 kHz

CMG601MF 13.56 MHz

Installation Diagram Standalone  
การทำงานเปิด - ปิดประตู



Standalone Access Control

Model	CMG601ID 125 kHz	CMG601MF 13.56 MHz
Operating Voltage	DC 12V+-10%	DC 12V+-10%
User Capacity	2,000	2,000
Card Type	EM(ID Card)	Mifare Card
Card Reading Distance	3-6 cm	3-6 cm
Active Current	<60mA	<60mA
Idle Current	25+-5mA	25+-5mA
Lock Output Load	Max 3A	Max 3A
Alarm Output Load	Max 20A	Max 20A
Operating Temperature	-45~60 °	-45~60 °
Operating Humidity	10%- 90% RH	10%- 90% RH
Waterproof	IP68	IP68
Adjustable Door Relay time	0 - 99 seconds	0 - 99 seconds
Adjustable Alarm Time	0 - 3 minutes	0 - 3 minutes
Wiegand Interface	Wiegand 26 bits	Wiegand 26 bits
Wiring Connections	Electric Lock, Exit Button, External Alarm & Reader	Electric Lock, Exit Button, External Alarm & Reader
Dimensions	L120 x W58x H20 mm	L120 x W58x H20 mm



■ HIP Shop    ■ HIP Service Center    ■ HIP Training Center