



GENATA

AI PoE SWITCH



120W

GNT-P4804V6

KEY FEATURE:

1. Using CAT.5 network patch cords support power for the wireless AP and IP camera
2. Networking standard: IEEE802.3af/at/bt
3. POE power light blinks to determine the power status of the receiving end, and each blink is 2.7 watts.
4. PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
5. Upload port automatic flip (Auto MDI / MDIX)
6. 6KV lightning protection,8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
7. The port power is 60 watts, it is convenient for high-power device
8. Zero configuration feature power supply is automatically supplied to the adaptive equipment

WATCHDOG

Auto-detect and restart IP camera timely if the camera is halted.



6KV LIGHTNING 8KV ESD



Reaching 6KV lightning and 8KV Static electricity protection, the PoE ports owns the capacity to keep the PoE Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

SUPPLY 60W HIGH POWER

60W high-power port to meet the needs of more and more high-power powered devices



EASY TO USE

The plug and play with no configuration makes the maintaining as easy as ABC. With the indicator lights of PWR and Link/Act, users can easily get the working status of the connected devices. All those will have no doubt to simply the use






SPECIFICATIONS:

Model	GNT- P4804V6
Ports	6X10/100Mbps PoE ports (RJ45) 2X10/100/1000 PoE ports (RJ45) 2X10/100/1000Mbps uplink ports (RJ45)/1X1000Mbps SFP
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000Mbps Half Duplex
Transmission Distance	0-130m
Performance Specification	Bandwidth: 11.2Gbps
	Network Latency (10 to 1000Mbps): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 8K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX/ IEEE 802.3ab 1000BASE-TX
	IEEE 802.3xFlowControl
	IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power input: AC 110~220V Total $\leq 120W$ PoE Watchdog: Port 1-8 Power output: PoE1~6Port:1/2(+52V),3/6(GND) $\leq 30W$ PoE7~8Port:1245(+53V),3678(GND) compatible1/2(+52V),3/6(GND) $\leq 60W$
	Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm
Working Environment	Operating Temperature: -30°C ~60°C (-22°~140°F)
	Storage Temperature: -40°C ~70°C (-104°~158°F)
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing
Electromagnetic Compatibility	CE mark
	FCCPart15, Class B
	VCCI ClassBEN55022 (CISPR 22)
	C-Tick
Warranty	Whole machine: 1 year
Package Content	AC Power Cable、 Installation Manual



Port description

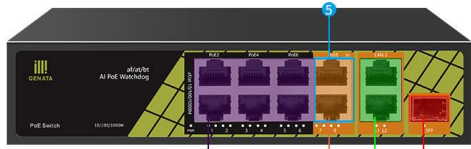


- 1 -100Mbps PoE Ports
- 2 -100Mbps PoE Ports
- 3 -100Mbps Uplink Ports
- 4 -100Mbps SFP Ports
- 5 -100Mbps 60W power supply Ports




AC Ports

Structure Diagrams

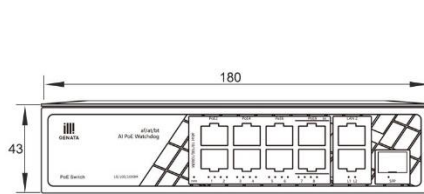

Units:mm

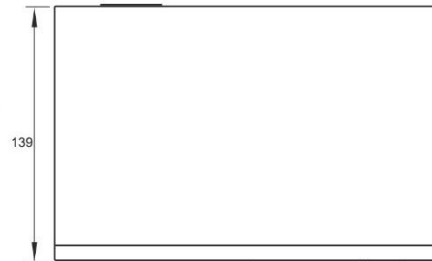

Product Installation



Typical Applications

