

Smart Interactive Display

MW3575-U-S



Key Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Zero bonding technology between lcd panel and cover glass brings brighter viewing and smoother touching experience.
- Ultra-narrow and equal-width bezel design for perfect aesthetics.
- Minimalist geometric line design and smooth border outline, elegant and attractive.
- Dual Wi-Fi modules with both Wi-Fi and hotspot support.
- Dual-channel, 6-array speaker brings high-quality surround sound.
- High-precision infrared touch technology allows up to 20-point touch, realizing smooth co-authoring.
- Bluetooth 5.0 offers higher data transmission rate, and lower power consumption.
- 4K UI, mobile-level operation, just like use a mobile phone.
- A variety of quick tools, such as annotation, screenshot, etc., improve usability and interaction efficiency.
- Wireless screen mirroring from various operating systems such as Android, iOS and Windows to the display with one touch.
- Fast file transfer. Allows users to quickly transfer files to the display via a QR code.
- OTA remote upgrade. The system can be upgraded online without backing up data.


Specifications


Model	MW3575-U-S
Panel	
Backlight	DLED
Panel size	75 inches
Resolution	3840*2160
Brightness (cd/m ²)	350
Contrast ratio	1200:1
Response time (ms)	8
Color support	1.07B
Viewing angle (H/V)	178°/178°
Android	
CPU	Quad-core Cortex 2*A53+Cortex 2*A73 and Mali G51 GPU
CPU frequency	1.5GHz
RAM	DDR4: 3GB eMMC: 32GB
Android version	Android 8.0
Touch	
Touch control	Infrared touch screen, 20-point multi-touch at most
Touch precision (mm)	±1
Recognizable object	5 points 2mm
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Response time (ms)	≤10
Touchscreen input	Opaque objects (e.g. finger, pen, etc.)
Interface	
Front interfaces	1*HDMI IN(4K)、2*USB 2.0
Side interfaces	2*USB 2.0、1*RS232、1*TOUCH OUT、2*HDMI IN(4K)、1*COAX
Bottom interfaces	1*LAN OUT、1*LAN IN、1*VGA IN、1*AUDIO IN、1*YPbPr、1*AV IN、1*AV OUT、1*AUDIO OUT
Audio	
Speaker	Left channel 17W: 1*treble (6Ω 5W) + 2*bass (6Ω 12W) Right channel 17W: 1*treble (6Ω 5W) + 2*bass (6Ω 12W)
OSD	
Language supported	24 (Simplified Chinese、Traditional Chinese、English、Japanese、Arabic、French、Spanish、Portuguese、German、Italian、Dutch、Polish、Korean、Catalan、Galician、Vietnamese、Bulgarian、Kazakh、Russian、Ukrainian、Thai、Uzbek、Hungarian、Croatian)

VESA	
Wall mount hole (mm)	600*400
Wall mount screw	4-M8 screw hole
General	
Power supply	AC 100 to 240V, 50/60Hz
Typical power consumption (W)	≤210
Standby power consumption (W)	<0.5
Operating temperature	0 to 50°C
Operating humidity	10% to 90% (non-condensing)
Storage temperature	-20 to 60°C
Storage humidity	5% to 90% (non-condensing)
Product dimensions (W*H*D)(mm)	1720*1028*89
Package dimensions (W*H*D)(mm)	2115*1336*222
Weight (kg)	Net weight: 53.0 Gross weight:60.5
Accessories included	1*power cord、2*touch pen、1*quick guide

Appearance

Dimensions

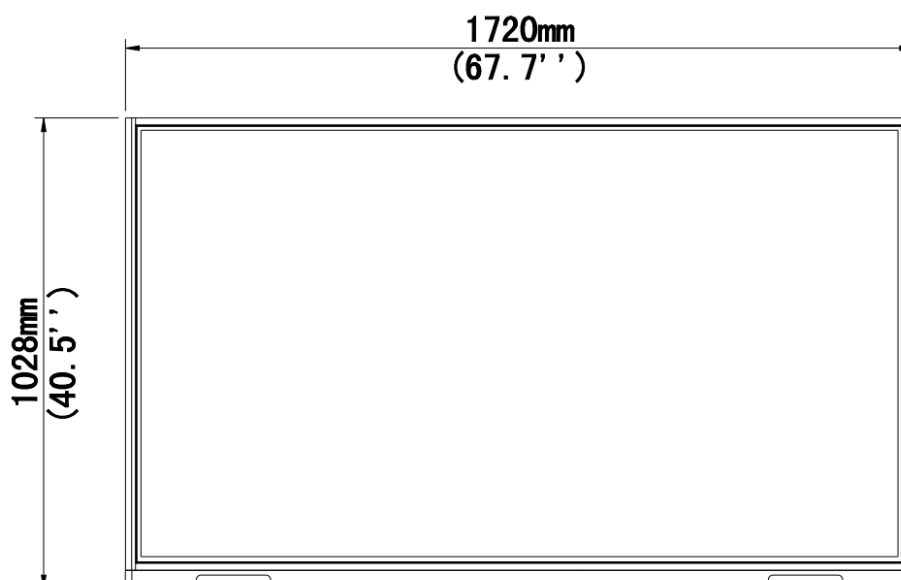

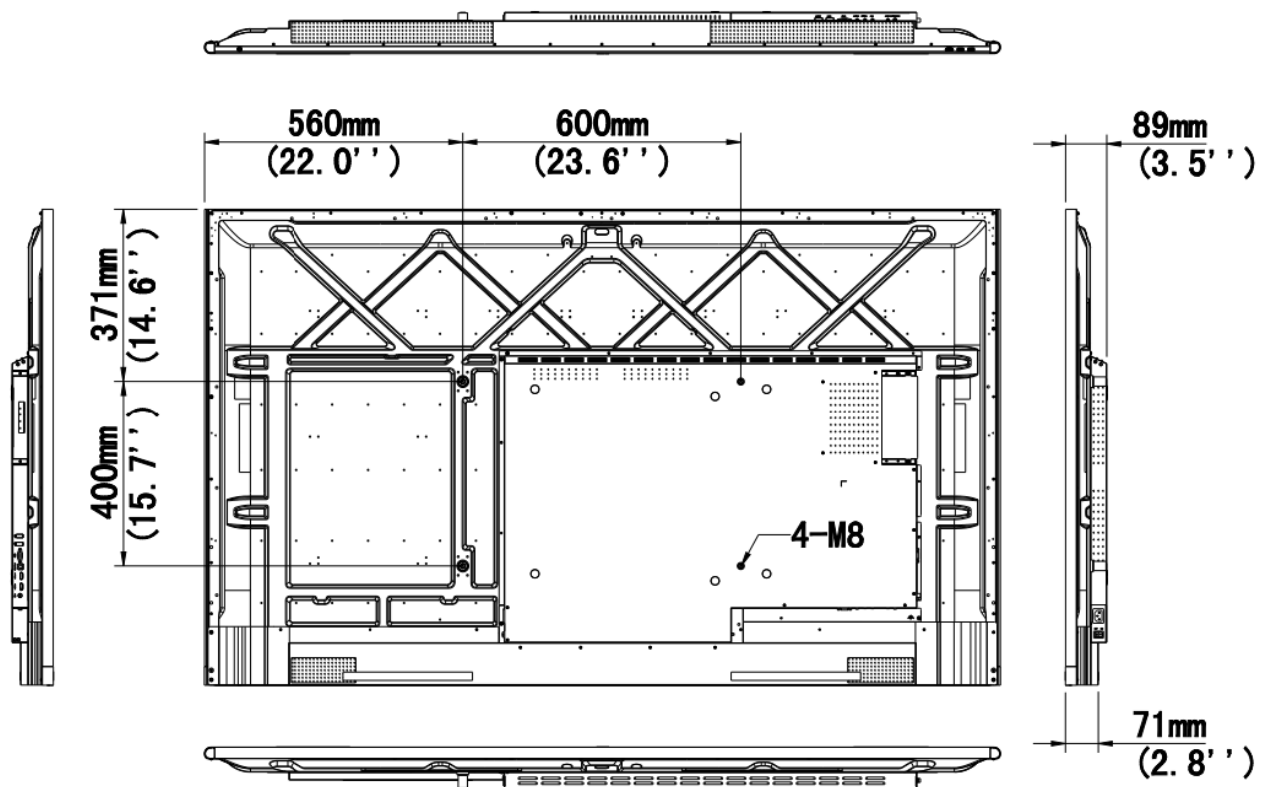


Interfaces


Front interfaces



Side interfaces

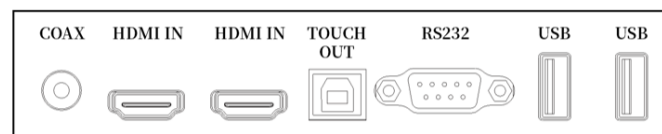

Bottom interfaces

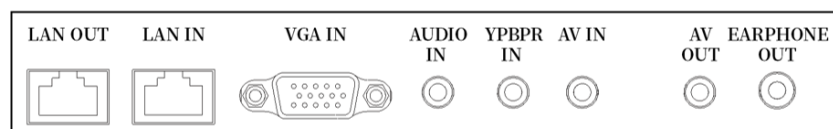

Order Information

Model	Remarks
MW3575-U-S	75" Smart interactive display
HB-7199-TP-S	Wireless screen sharing dongle
HB-4365	65" to 86" Wall mount
HB-8765-S	65" to 86" Mobile stand
HB-7099-M1	Pluggable PC module with i5 processor (Windows 10, not activated)
HB-7099-S1	Pluggable PC module with i7 processor (Windows 10, not activated)
LIS-WIN10-V	OS-Windows 10-1 to 1 license-IoT Enterprise Value version (with i5 processor OPS PC module)
LIS-WIN10-H	OS-Windows 10-1 to 1 license-IoT Enterprise High End version (with i7 processor OPS PC module)

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.