

HIP



HS-PS86

PIR Sensor 433MHz




PIR Motion
Sensor



Low Power Circuit




Wide Angle

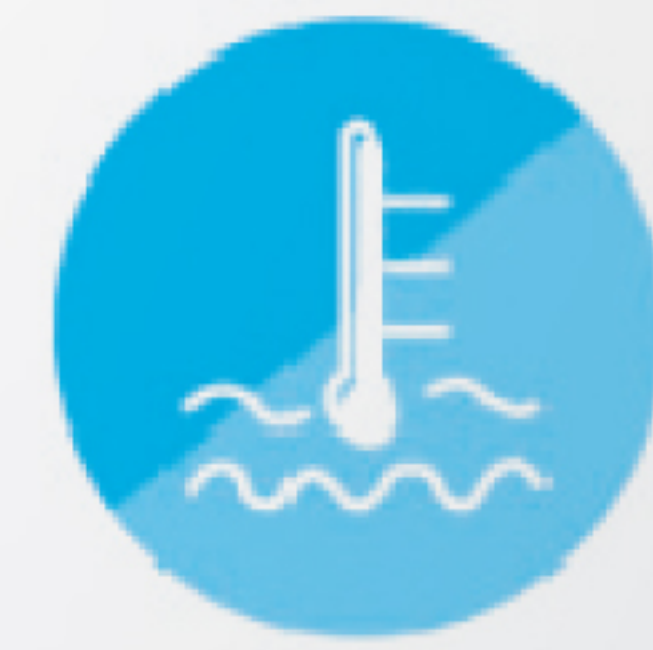

Temperature
Compensation

Features

- Binary infrared Detection elements and Micro processing chip, high intelligent, high sensitivity.
- Detective range can get to 12m, horizontal angle 110° , vertical angle 15°.
- Syncs with the Alarm Security System for connected home security
- Automatically sends mobile notifications when an alarmed door or window is open
- Connects to work seamlessly with other smart home gadgets

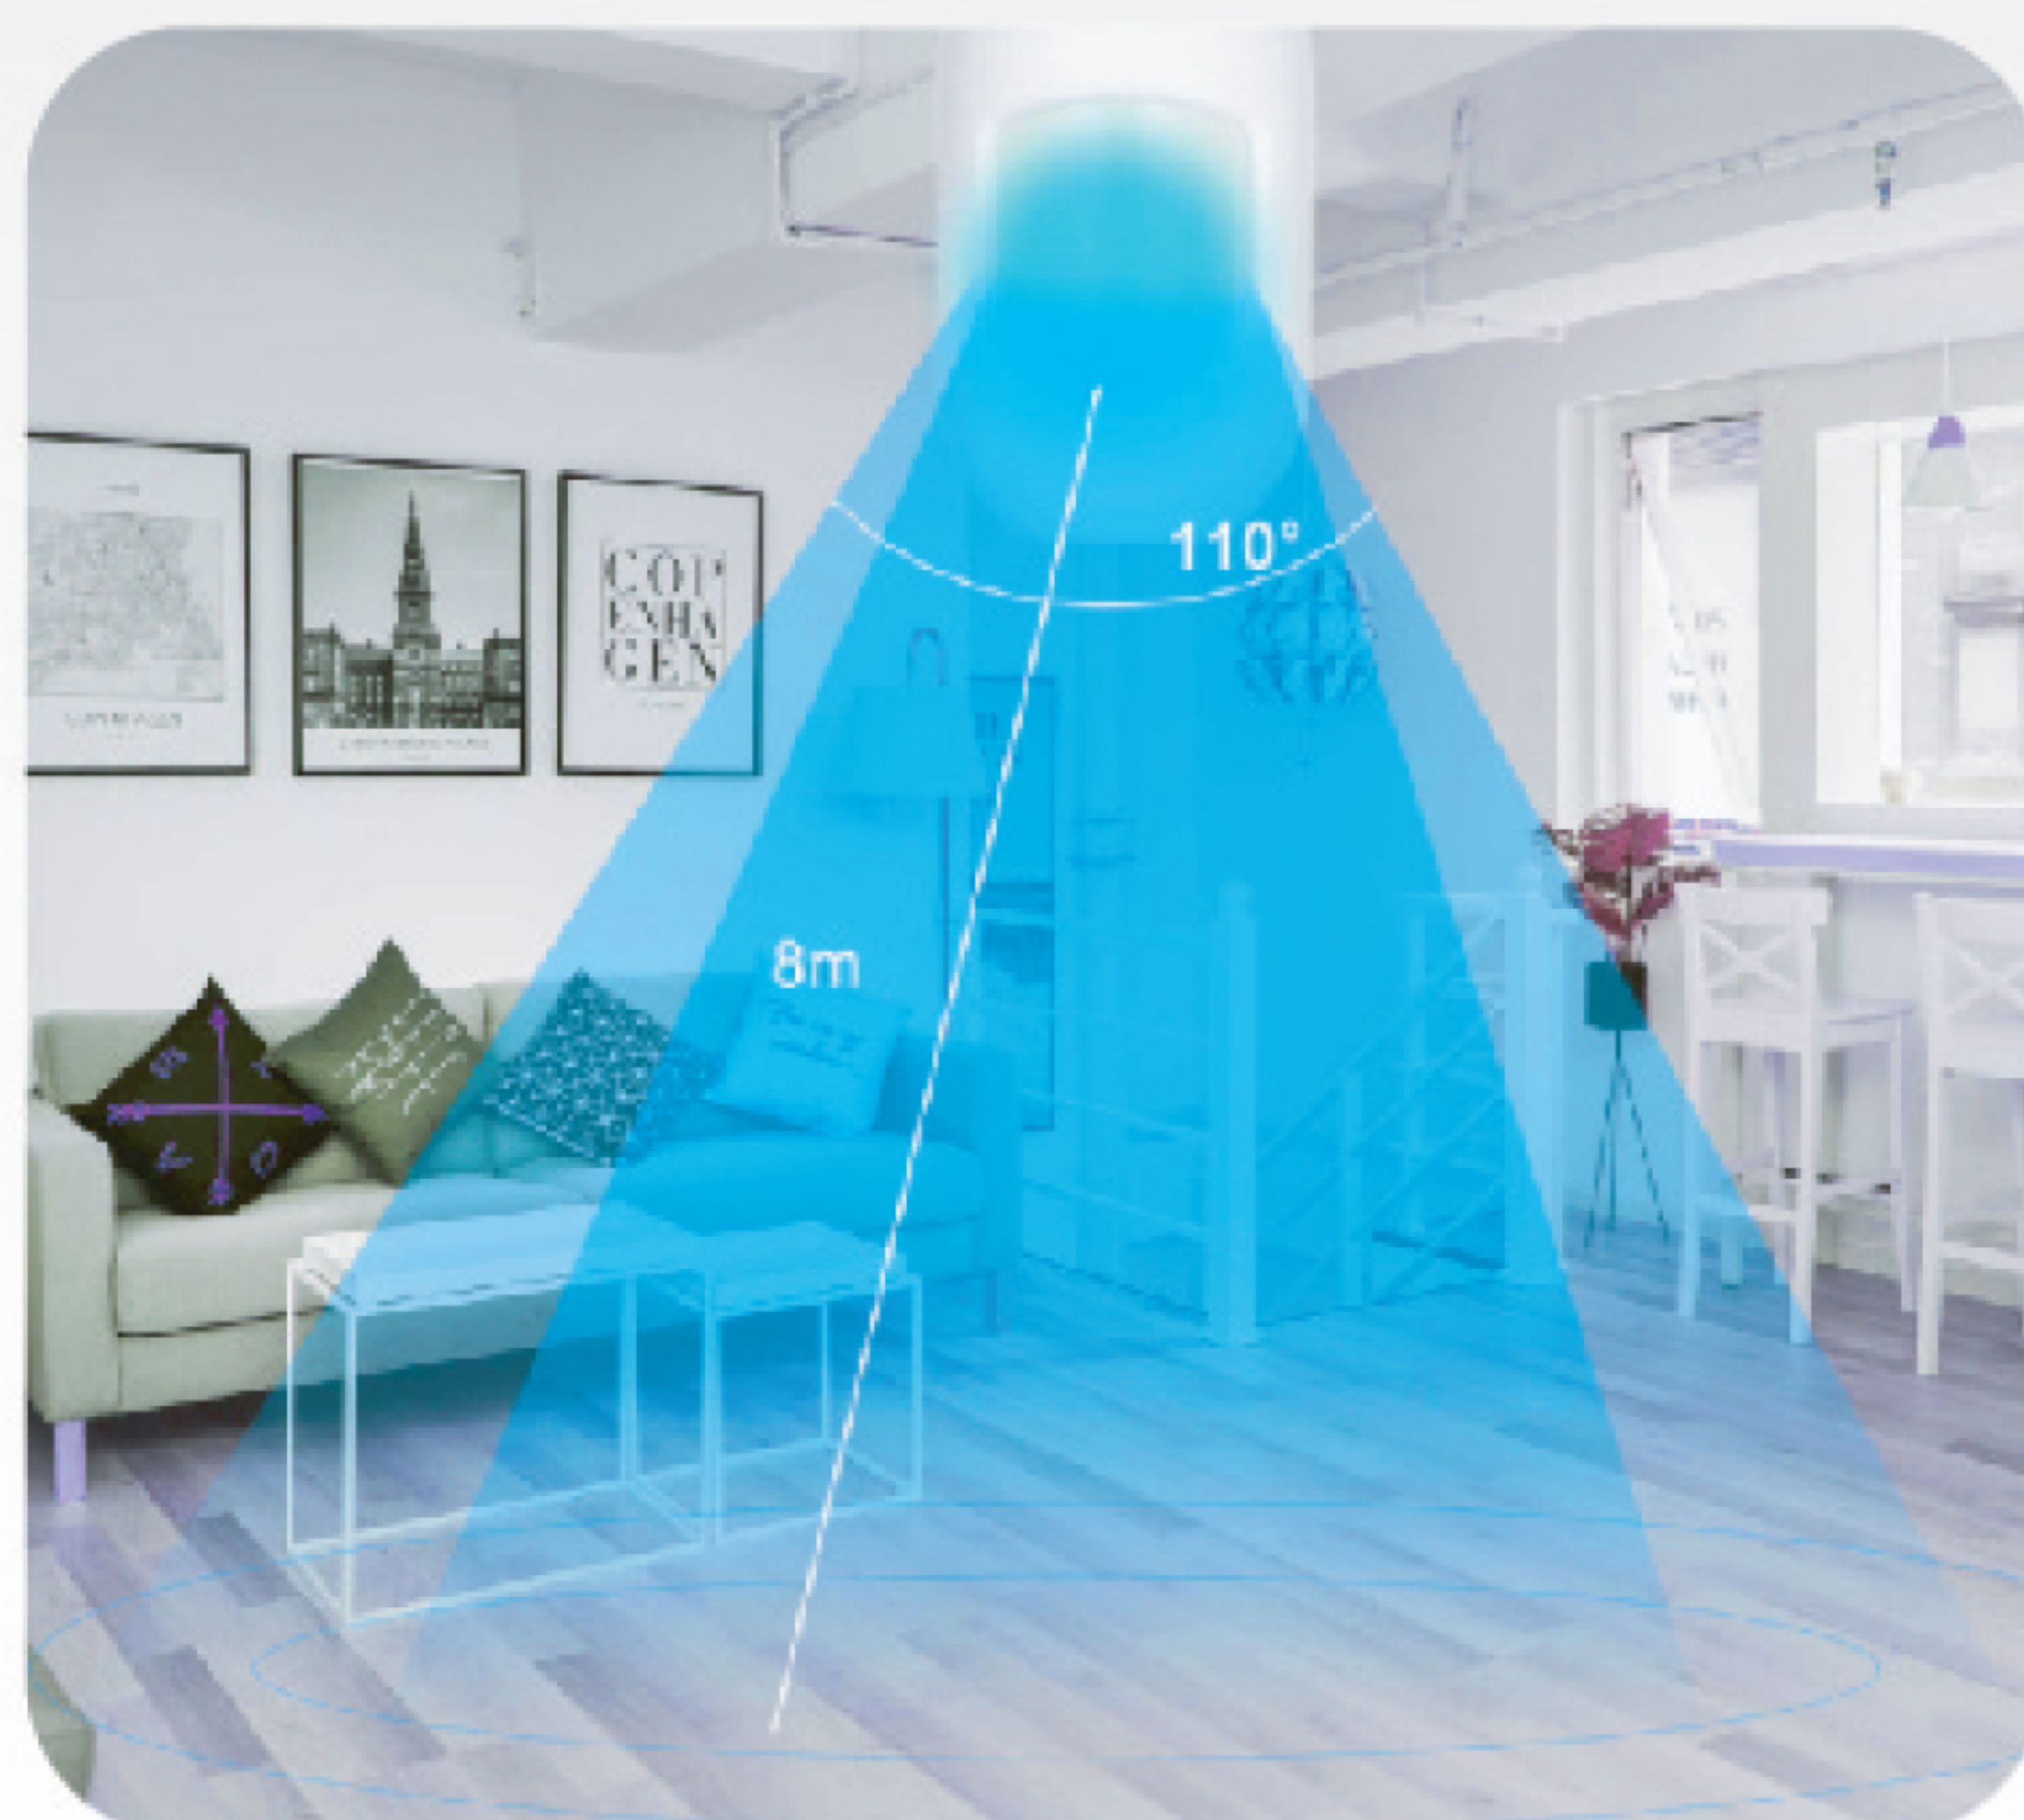

Technical Specifications

Working voltage	3V AA*2 battery
Static current	≤ 15uA
Working current	≤ 25mA
Wireless data code	1527 max area: 12m X 12m
Wireless frequency	433.92MHz 868.4Mhz (optional)

